



10-Port 10/100Mbps Smart PoE Switch

WIS-SF810P

WISNETWORKS TECHNOLOGIES CO., LTD.

Address: No.77, FuTe West 3 Road, China (Shanghai) Pilot Free Trade Zone

E-mail: info@wisnetworks.com Web: www.wisnetworks.com

Version 1.0

Product Overview

WIS-SF810P adapts standard 802.3at/802.3af power supply protocols , compatible with IEEE802.3af/IEEE802.3at.CCTV/Vlan/Default optional by sliding a simply switch on the front panel to meet different scene request.

Features

Lightning protection

- Professional port lightning protection
- Provide stable and reliable power
- Flashing alert for non-PoE




Over Voltage Protection

- Auto detect PD voltage
- Protect device from over-voltage
- Flashing alert for non-PoE




Ultra Long Power Supply Distance

- Supports 100 m distance
- Supply distance flexible
- Easy to know the system status

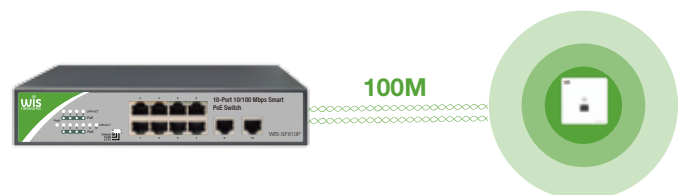


Hardware VLAN Feature

- VLAN on/off switch
- Uplink port design
- Avoid broadcast storm
- Client isolation for secure data

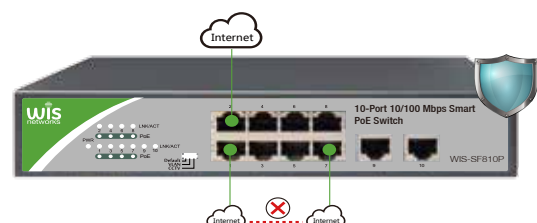

Network Topology

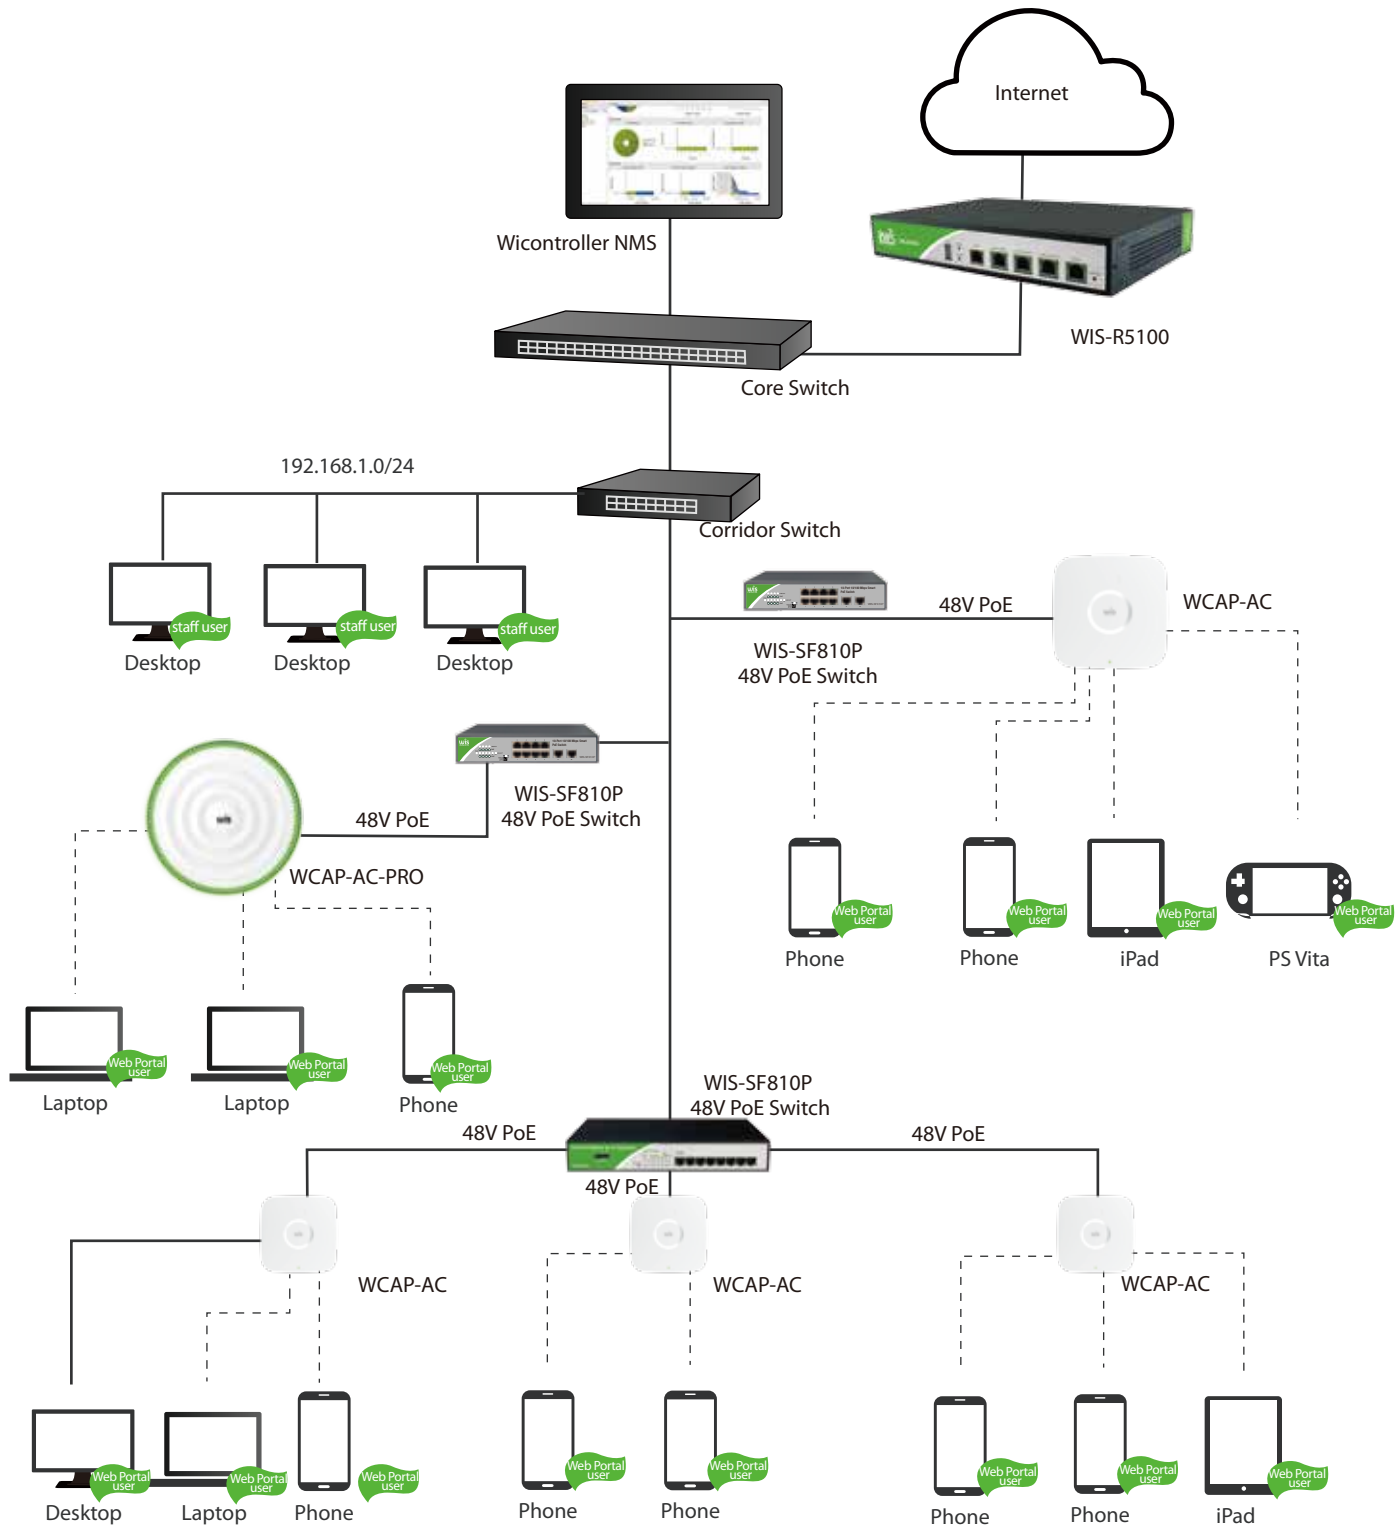

SPECIFICATION

Model	- WIS-SF810P
Ports	- 10x 10/100Base-T Ethernet
PoE Ports	- 1~8
PoE Method	- 4/5 (+) 7/8 (-)
PoE Output	- DC: 48V Adjustable
PoE Power	- 110W
VLAN	- Controlled by On/Off Switch - VLAN On, Port 1~8 isolation, Port 9/10 uplink - VLAN off, Port 1-8 Interworking
Forward Type	- Store and forward
Capacity	- 2G
MAC Table	- 8K
Jumbo Frame	- 1.5KB
Buffer	- 4Mbit
PPS	- 1.48Mpps
Input Voltage	- AC 100-240V 50-60Hz
Working Temperature	- 0℃~40℃
Storage Temperature	- -40℃~70℃
Working Humidity	- 10%~90% RH non-condensing
Storage Humidity	- 5%~90% RH non-condensing
Dimension	- 220*150*44mm
Weight	- 1.5kg
LED	- PWR、LNK/ACT、PoE
Cable	- 10BASE-T: Cat 3、4、5 UTP (≤100m) - 100BASE-TX: Cat 5 and up UTP (≤100m)

Related Products



WIS-R5100



WCAP-AC



WCAP-AC-PRO